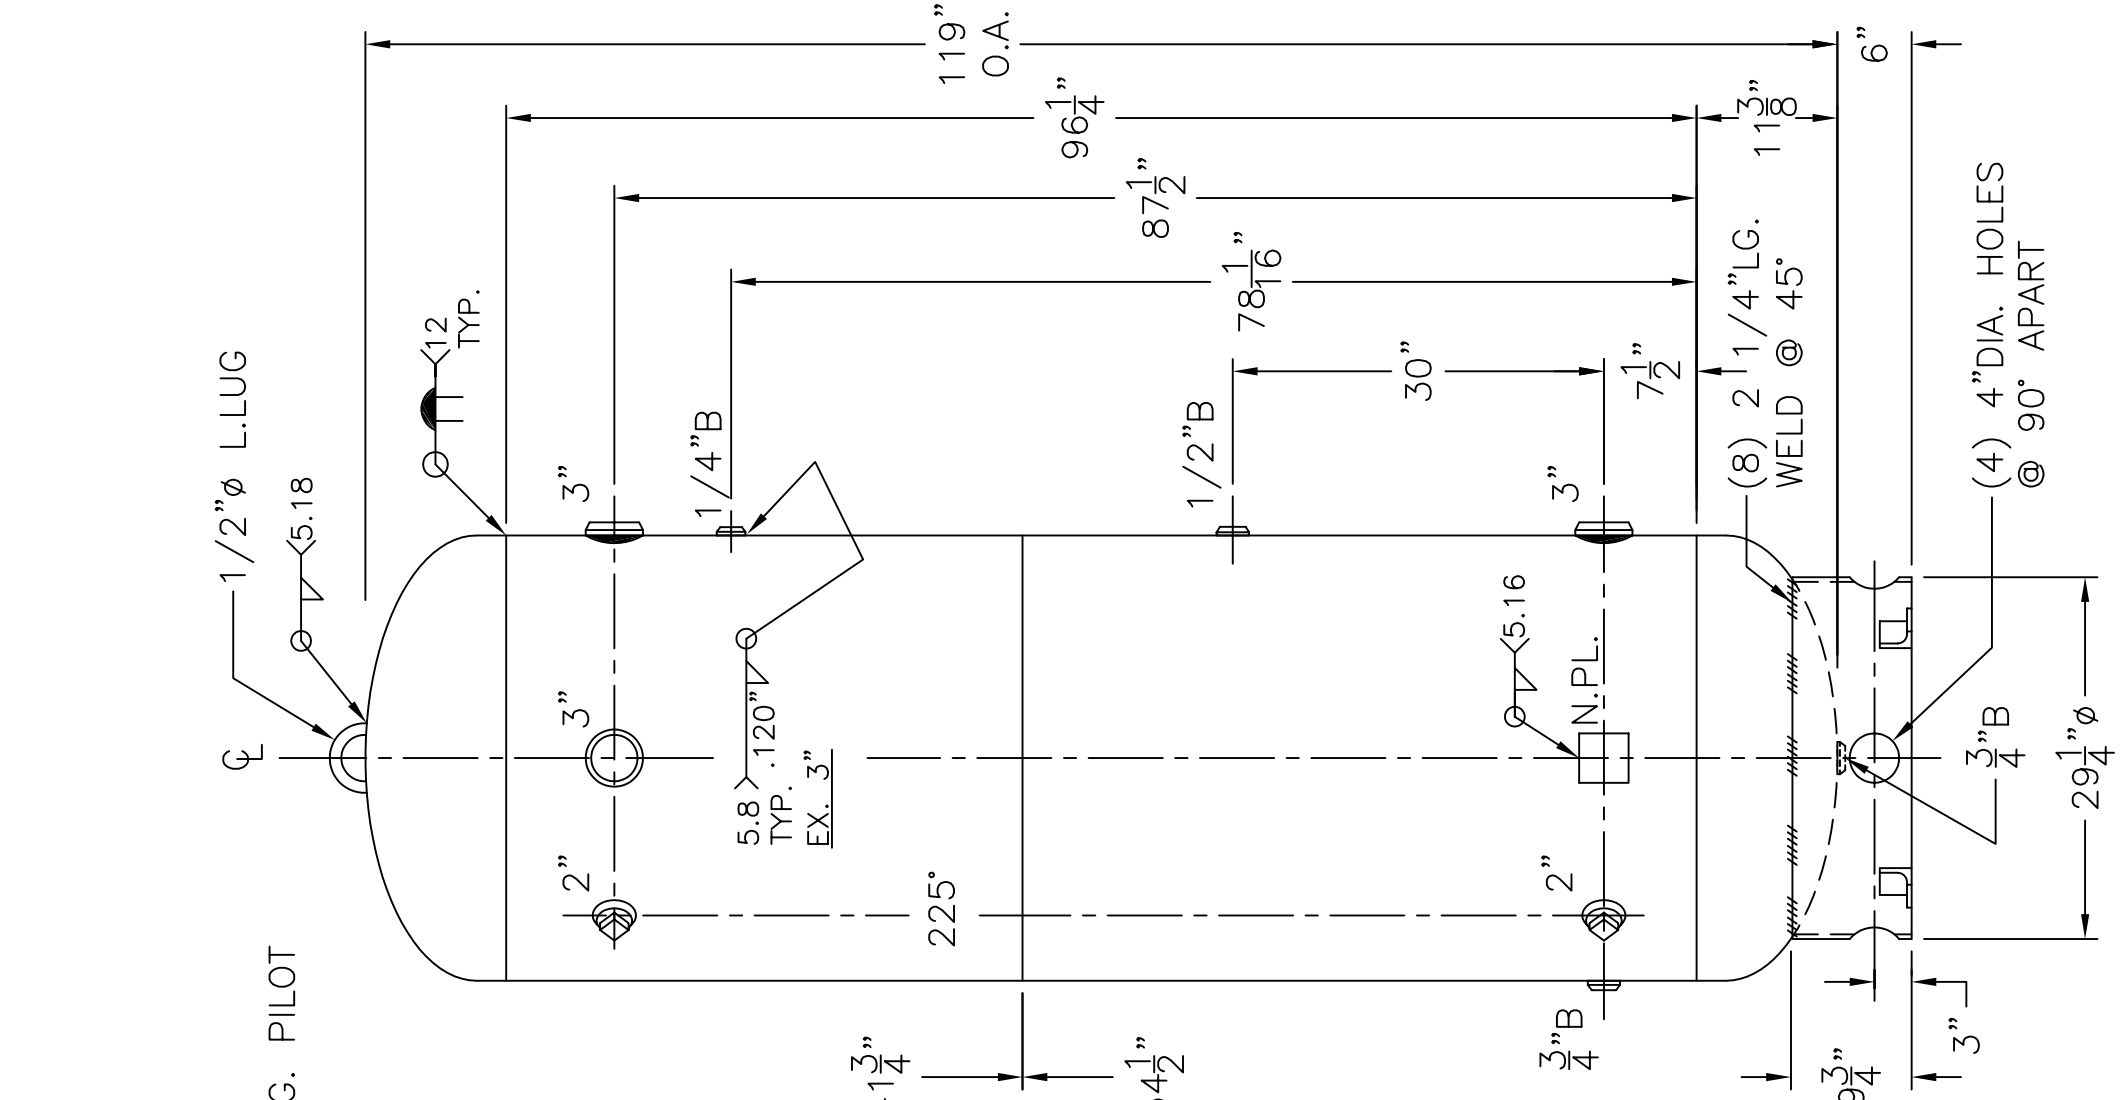

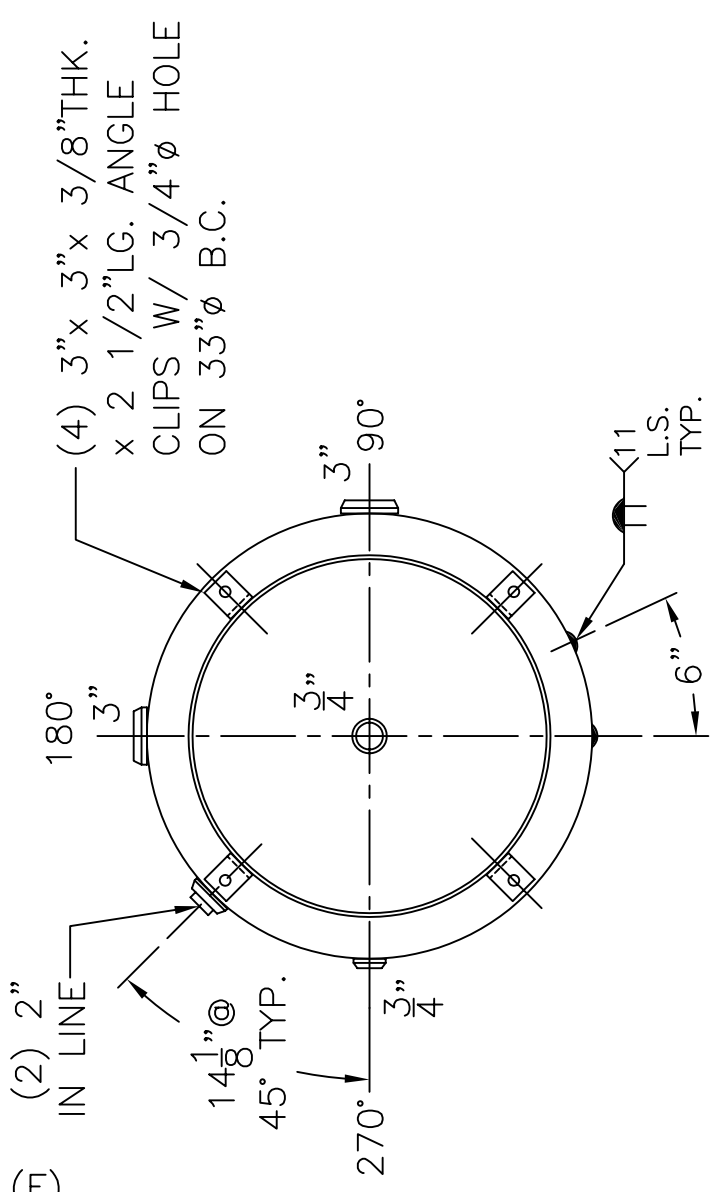

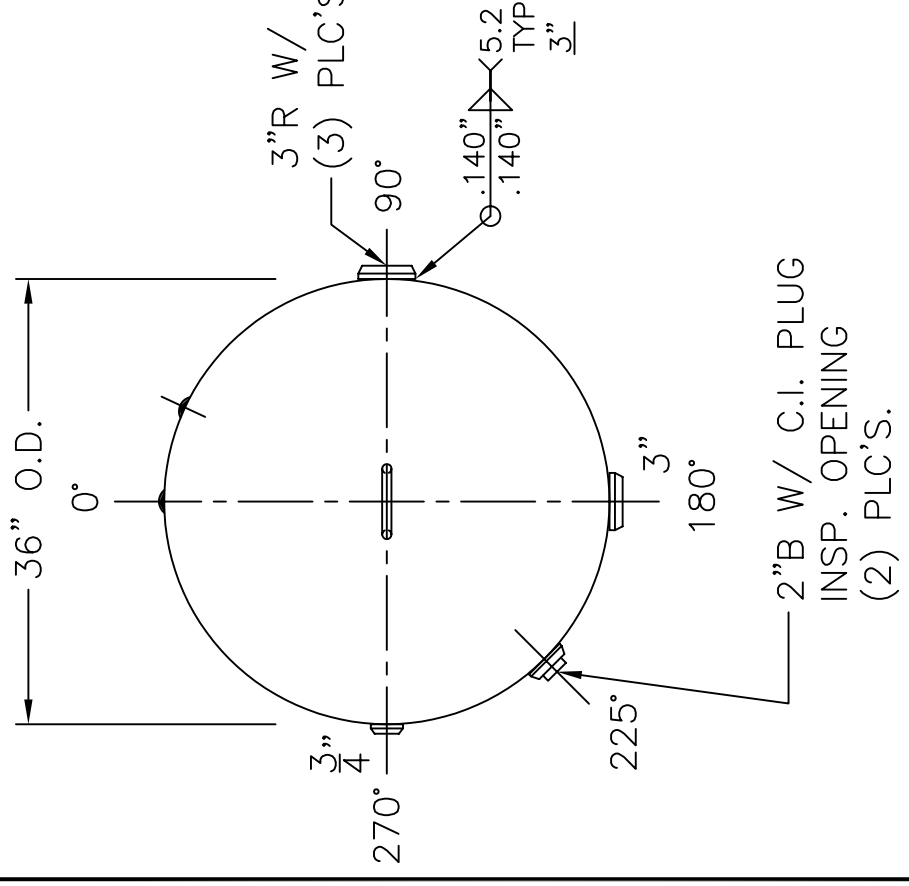

3) NO IMPACT TESTING UG-20 (F)
2) DRAIN FOR HORIZONTAL MOUNT ADDED AFTER SERIAL #423,136
NOTE: 1) HYDRO @ 215 PSIG. MIN.

SHELL / HEADS	.165" SA-414-G 2:1 S.E.
	JOGGLE
	(.162" MIN.)
	.164" SA-414-G
M.A.W.P. 165 PSIG. @ 400 °F	
M.D.M.T. -20 °F @ 165 PSIG.	
ASME. SECTION VIII DIV. 1, 2013	
X-RAY: RT-4 SPOT L.S. ONLY	
GALLONS: 500	WT. 726 LBS.
SERIAL NO.	
N.B.	

36-VM-500-R	REV. 1-16-14
	DATE: 10-10-83
FOR: HANSON STANDARD	
VERT. AIR TANK	
B.C. CRN #K5761.1	
INSIDE: UNPAINTED	
OUTSIDE: PRIME	
CAD "B" SIZE UNDER "STD"-SERIES	
BY: E.S.	SCALE: 3/4"=12"

ROY E. HANSON JR. MFG.
1600 E. WASHINGTON BLVD.
LOS ANGELES, CA 90021