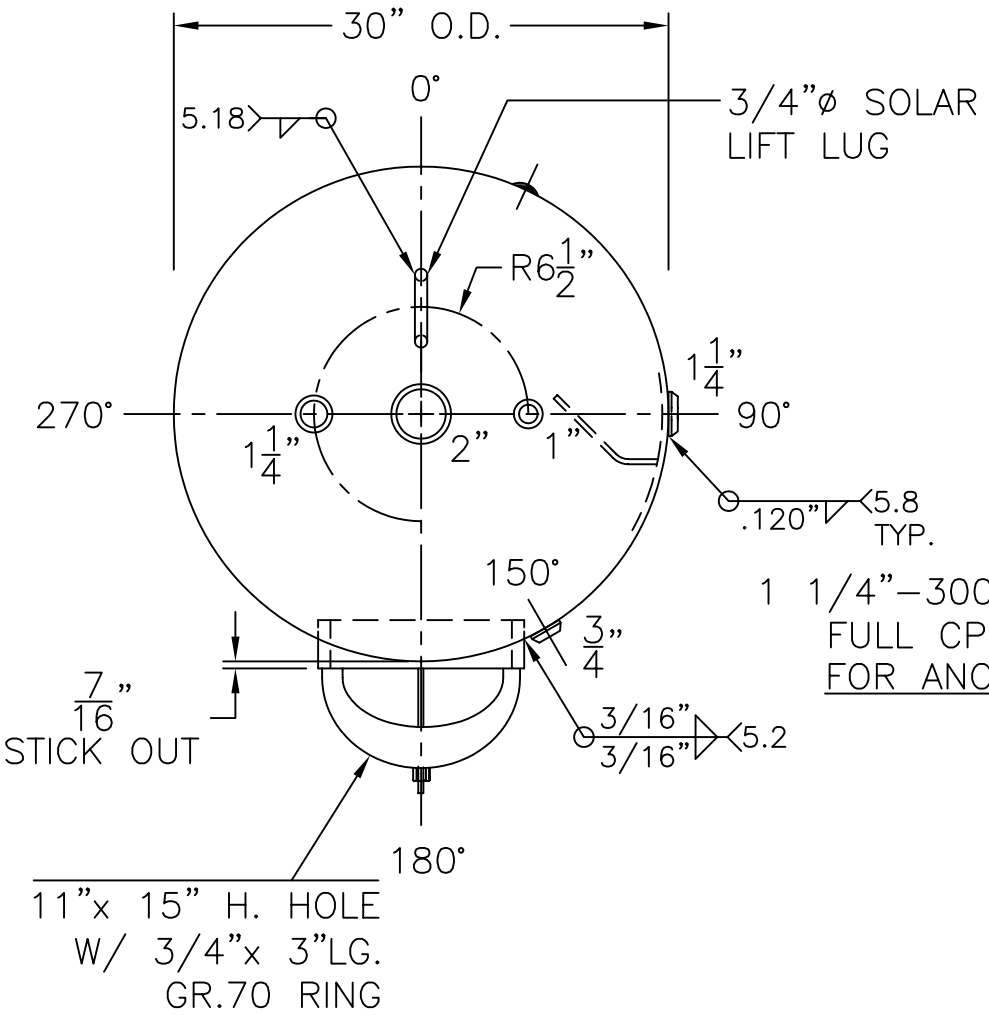

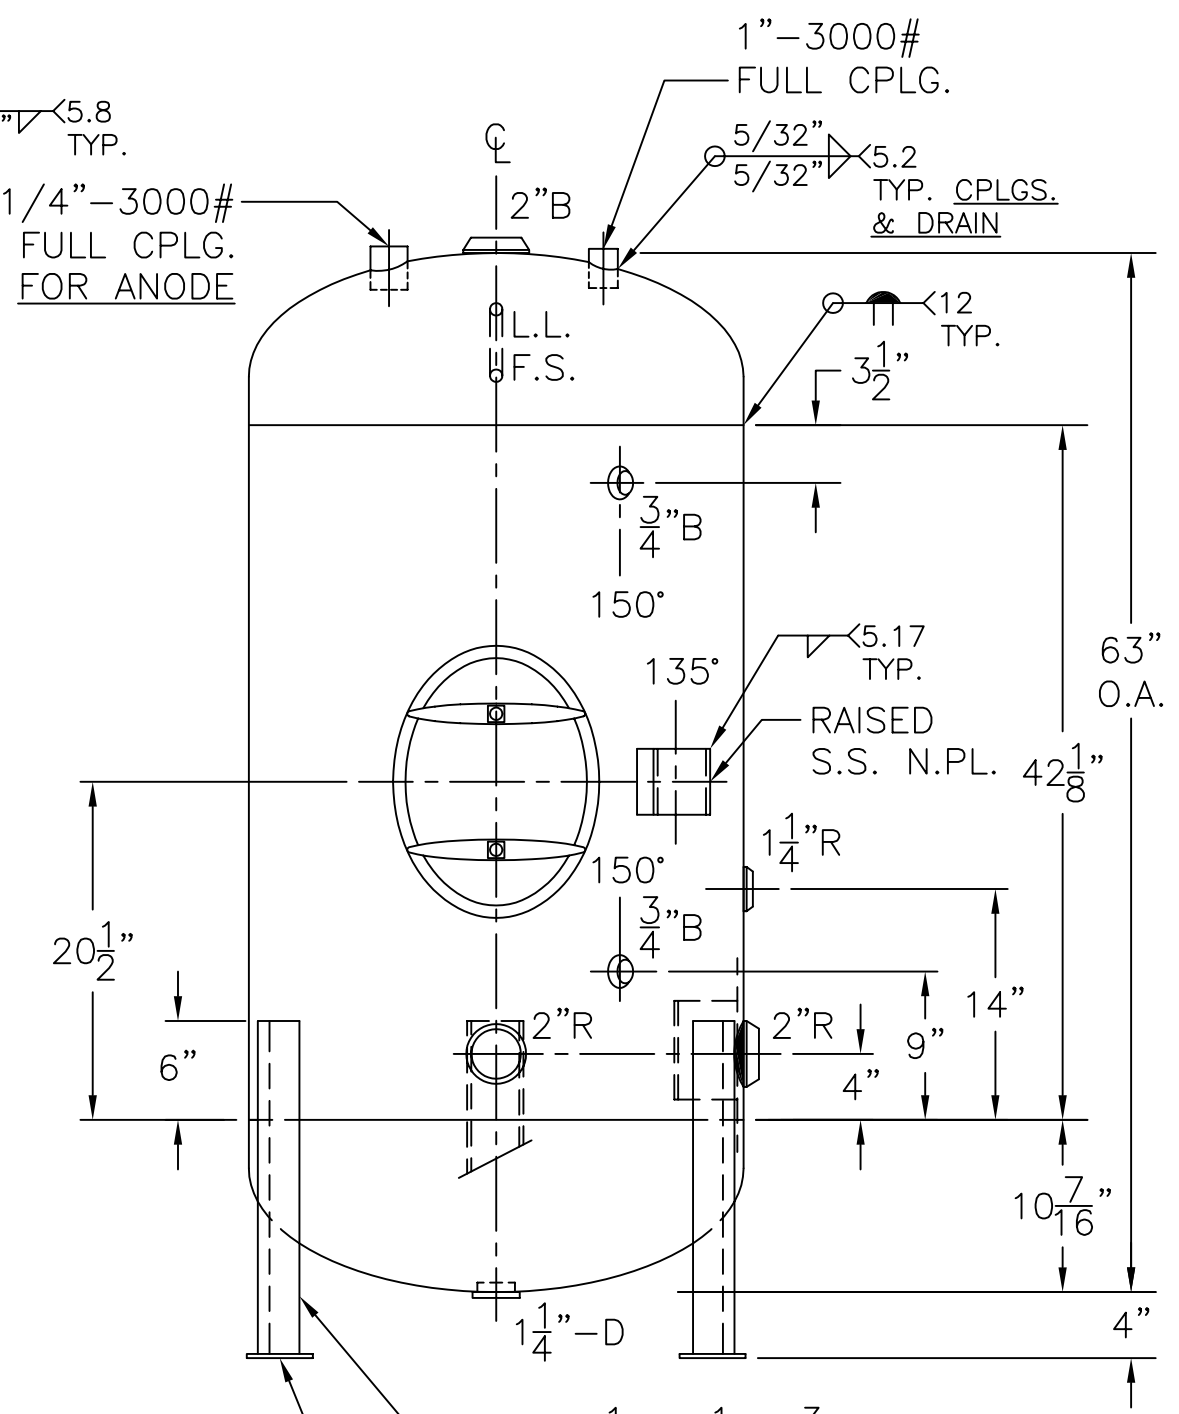

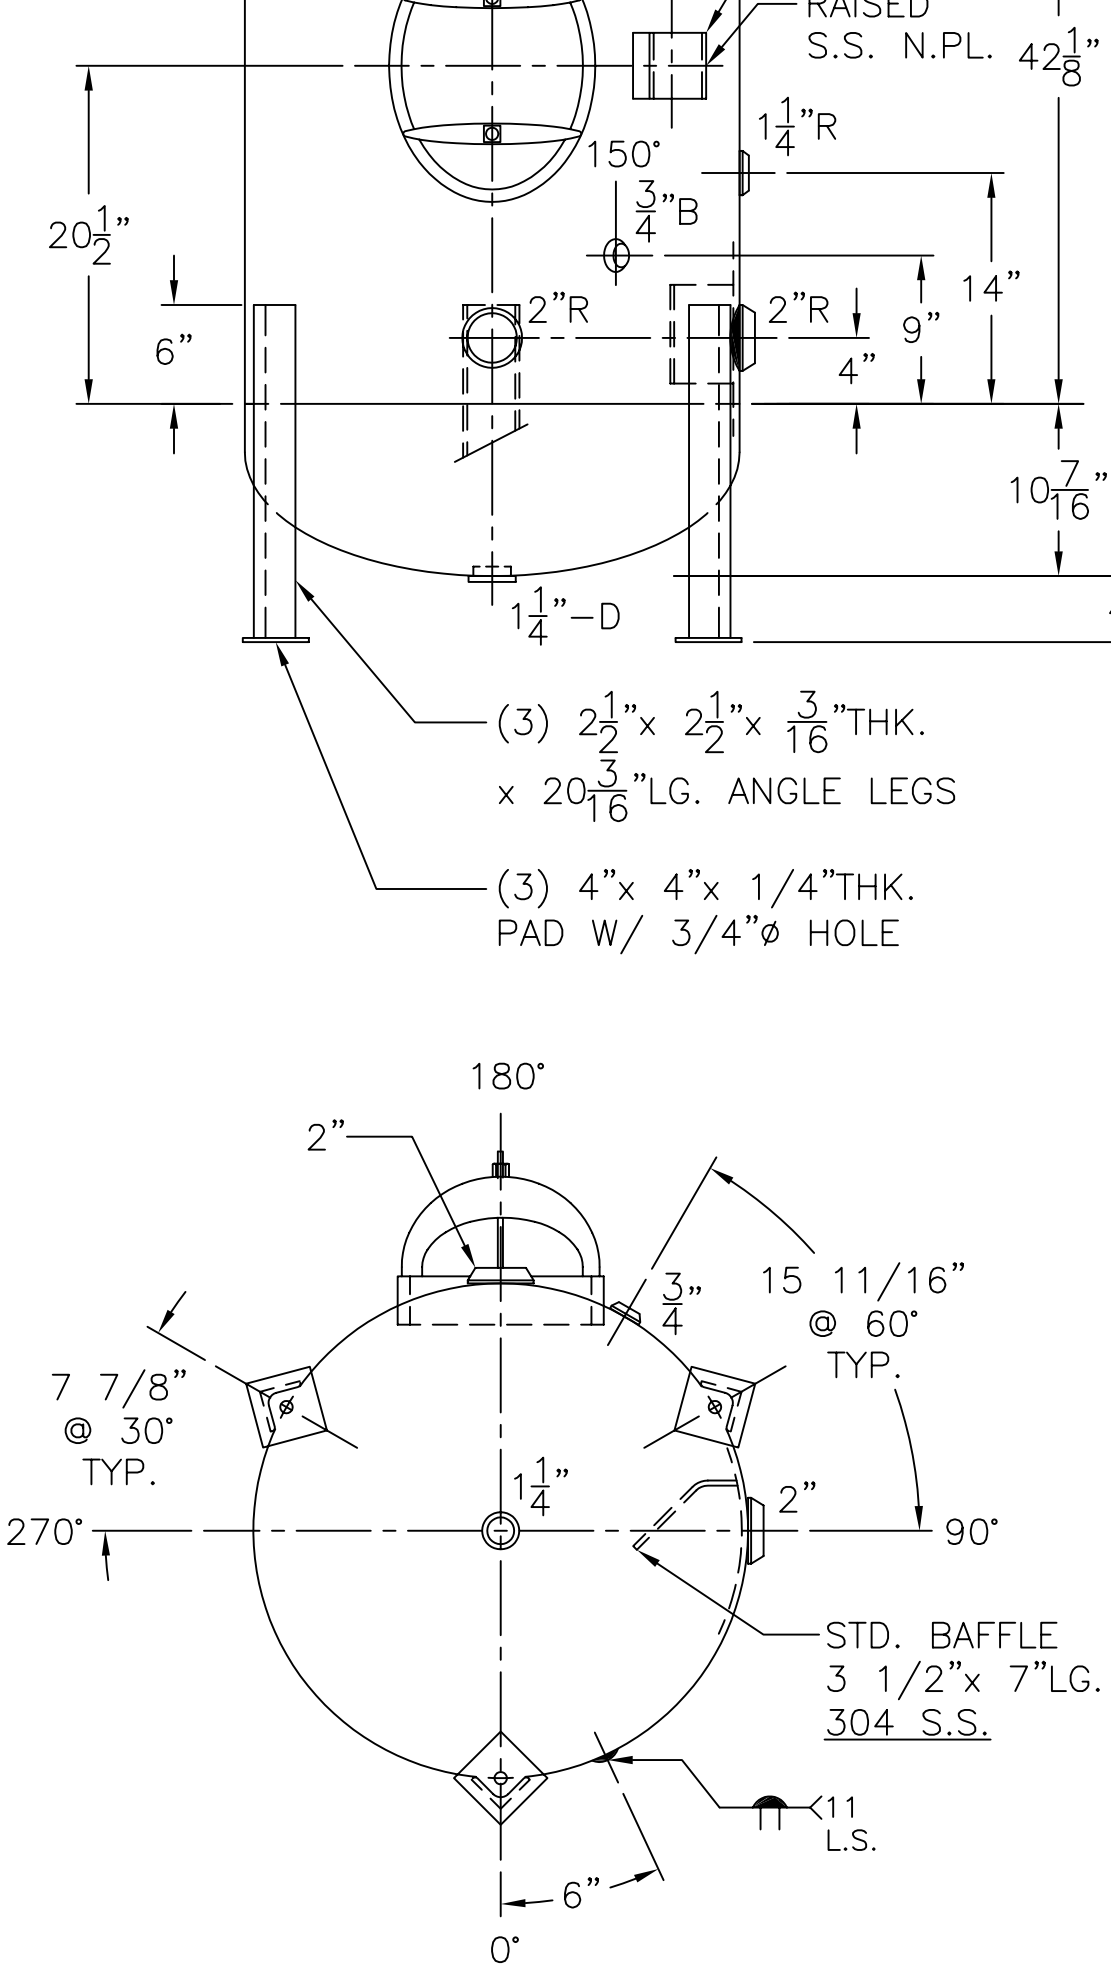

NOTE: 1) SHIP LOOSE W/ (1) 1 5/16"x 36"LG. FLEX MAG. ANODE.
2) 4–1–04 PROOF TEST.
3) HYDRO @ 240 PSIG.

SHELL / HEADS	
.166" SA–414–G 2:1 S.E.	
JOGGLE	
.165" SA–414–G	
M.A.W.P. 160 PSIG. @ 210 °F	
ASME. SECTION VIII 2013	
X–RAY: RT–NO / H.L.W.	
GALLONS: 180	WT. 404 LBS.
SERIAL NO.	
N.B.	

GS–30–180–V	REV. 1–16–14
	DATE: 5–29–90
FOR: HANSON STANDARD	
VERT. WATER TANK	
SURFACE AREA = 45.0 SQ. FT.	
INSIDE: GLASS OR EPOXY	
OUTSIDE: PRIME	
CAD "B" SIZE UNDER "STD" SERIES	
LEG–ZONE 4–15 KM.	
BY: E.S.	SCALE: 1" = 12"

ROY E. HANSON JR. MFG.
1600 E. WASHINGTON BLVD.
LOS ANGELES, CA 90021